


# TACHIT®

## MODEL #5150

### MULTI ROLL PRESSURE SENSITIVE LABEL DISPENSER

#### Instruction Manual

Able to hold 5 different rolls of labels, the Model #5150 allows the operator to dispense whichever label they need

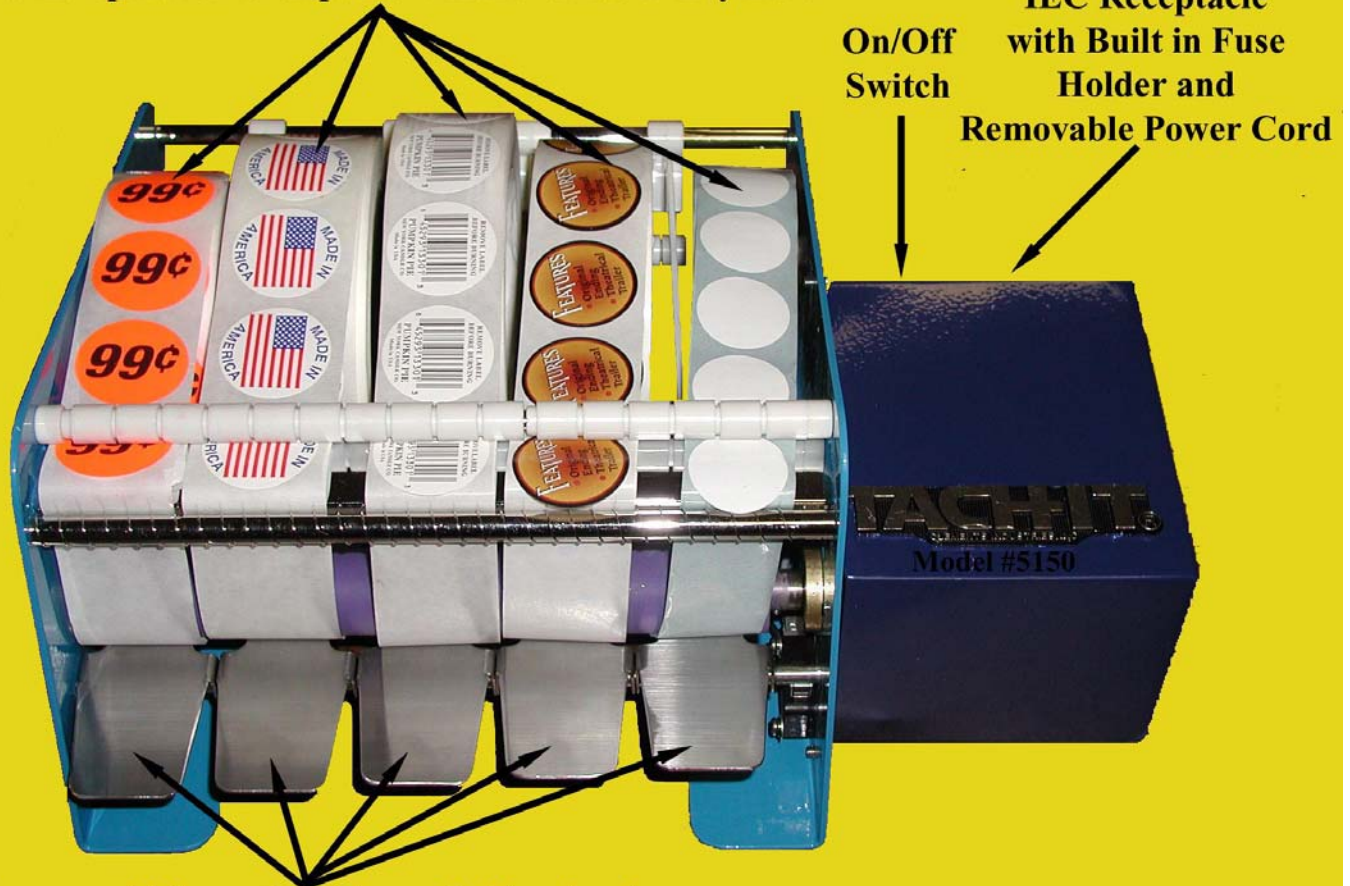

Dispense whichever label is needed by simply pushing on the tab

**BEN CLEMENTS AND SONS, INC. / CLEMENTS INDUSTRIES, INC.**

50 RUTA COURT, SOUTH HACKENSACK, NEW JERSEY 07606 U.S.A.

TEL: 201-440-5500 TOLL FREE: 800-222-5540 FAX: 201-440-1455



WEBSITE: WWW.TACH-IT.COM EMAIL: SALES@TACH-IT.COM

TACH-IT (U.K.) ENGLAND, CLEMENTS INDUSTRIES JAPAN, CLEMENTS INDUSTRIES, INC., KOREA  
COPYRIGHT BEN CLEMENTS AND SONS, INC. AND CLEMENTS INDUSTRIES, INC. AUGUST 2006

## **Section 1—Cautions:**

- 1) Read and understand the complete operator's manual prior to using this machine.
- 2) Never have the power on this machine plugged into the power source when any of the covers of this machine have been removed. This machine has a high voltage input and electrical shocks are possible if the machine is plugged in and the covers are removed.
- 3) Always move this machine, by holding it from the base, never the shafts, separators or motor casing.
- 4) Install and operate this machine only on a flat, level and dry surface.
- 5) Use only the specified electrical power input with this machine.
- 6) Always keep hand, clothing, jewelry and hair away from all moving parts of this machine.
- 7) Do not operate this machine without the motor cover in place and properly installed.
- 8) Keep this machine clean and dry at all times.
- 9) Service on this machine should only be performed by factory trained authorized service personnel.
- 10) Never use this machine for other than its intended applications. Use of this machine on unintended applications can cause harm to the operator and the machine. Please contact the manufacturer if there is any question as to whether this machine can be used on a certain application.

## Section 2—Machine Front and Side Views:

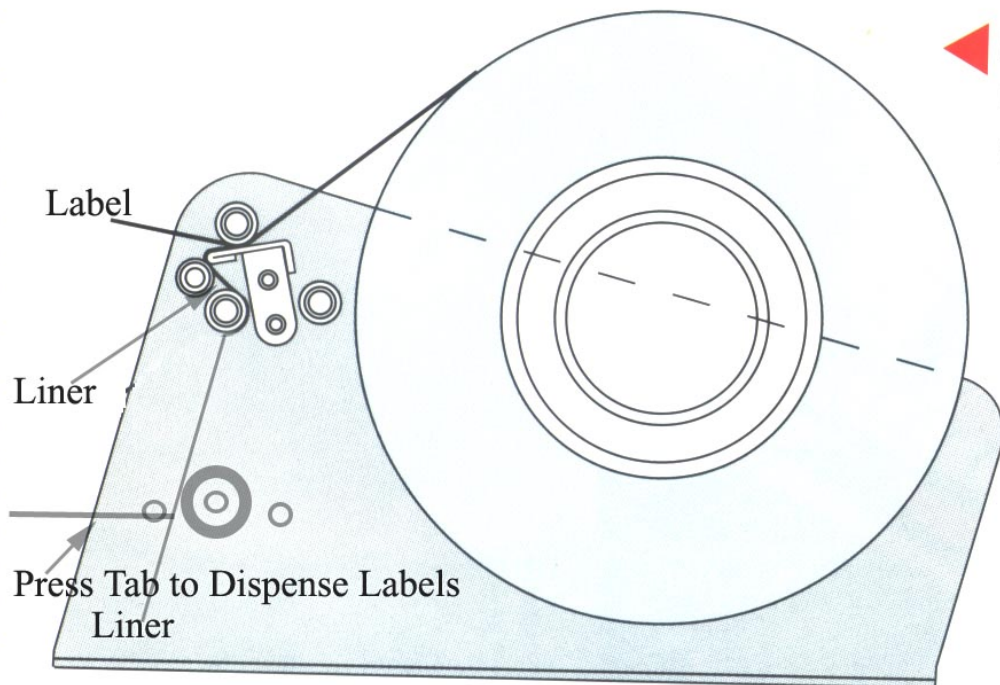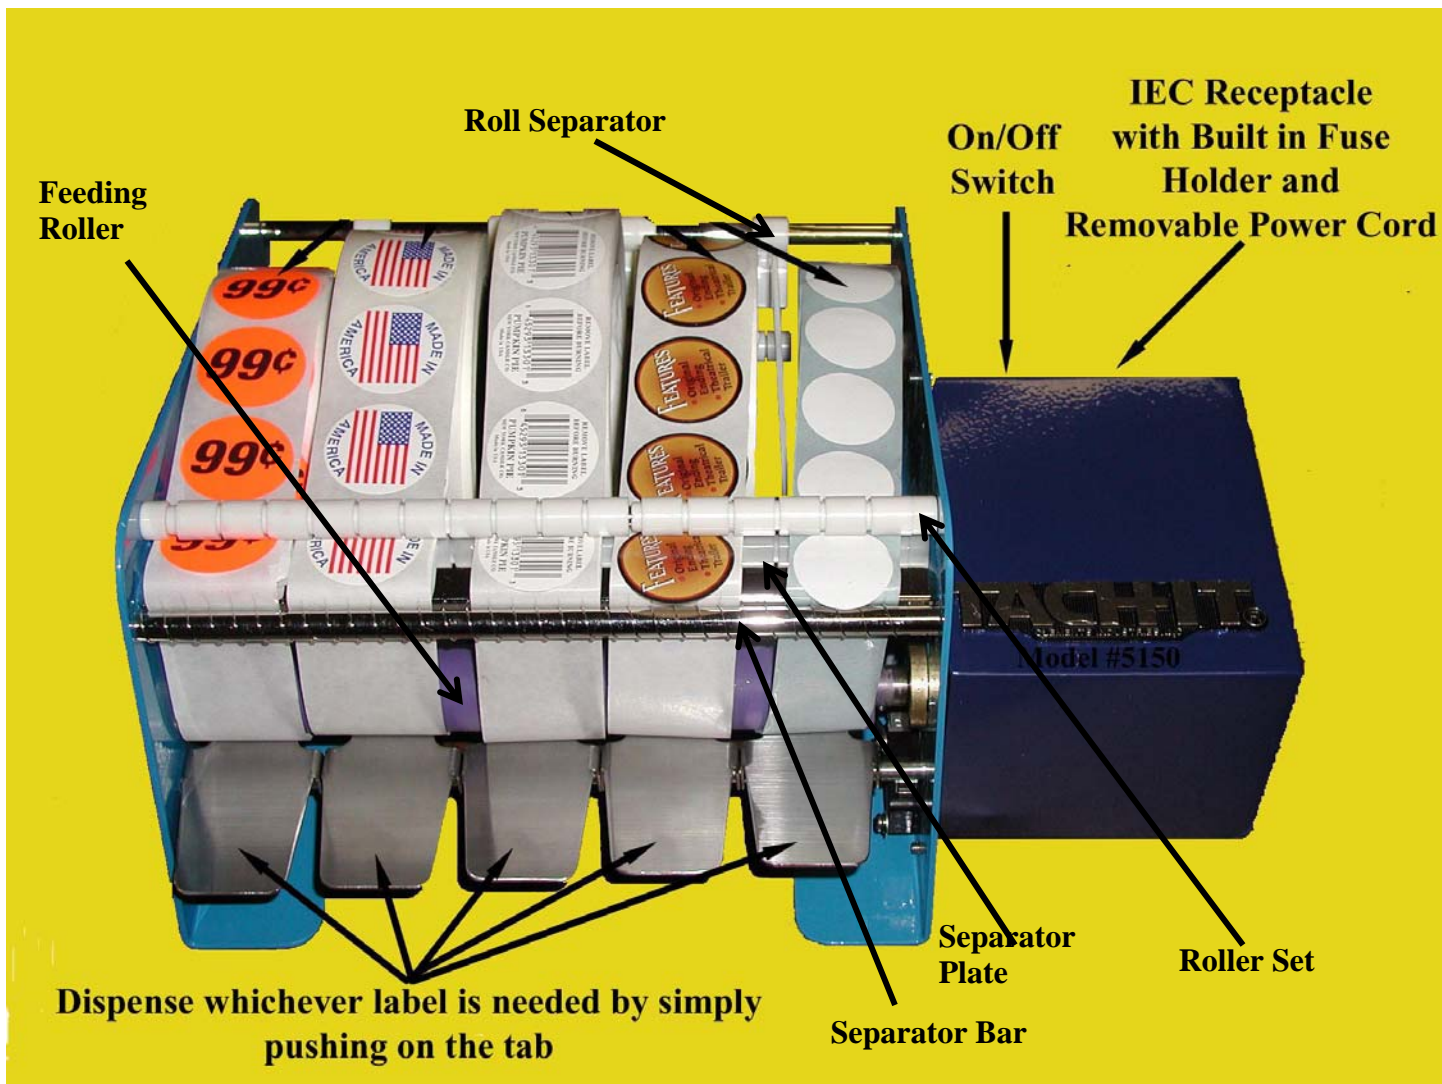

◀ Peel off device makes an easy outlet.

## **Section 3—Loading of the Labels, Use of the Machine and Machine Specifications:**

### **Loading the labels:**

- 1) Take the rolls of labels and place them into the cradle at the back of the Tach-It Model #5150 so that the labels are coming from the top of the roll. Use the Roll Separators between the rolls of labels too keep them apart from each other. See the Figures in Section 2 of this manual.
- 2) Take the leading edge of the label liner and insert it under the Roller Set located at the front of the machine. See the Figures in Section 2 of this manual.
- 3) Take the leading edge of the label liner and fold it around the Separator Plate and behind the Separator Bar as shown in the previous figures.
- 4) Continue pulling the label liner and feed it between the Feeding Roller and the Tab as shown in the figures on the previous page.
- 5) After this has been done for all rolls of labels, the unit is ready for use.

### **Using the Tach-It Model #5150:**

- 1) Simply press the Tab in front of the label that needs to be fed. Hold the Tab until the label is fed all the way out.
- 2) When a different label is needed, hold the Tab corresponding to that label and it will feed.
- 3) To Change label rolls, simply pull the liner out from between the Feeding Roller and the Tab and remove the roll of labels from the unit. Install the new roll as per the instructions above.

### **Machine Specifications:**

Length:	12 1/2 inches
Width:	10 inches
Height:	6 inches
Weight:	9 Lbs.
Maximum Roll Diameter:	7 1/2 inches
Core Size:	Not Applicable
Maximum number of rolls:	5 on the machine at one time
Maximum Width of Labels:	1 1/2 inches wide
Power:	110 Volt